


GENERAL NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS & LEVELS ARE IN METERS UNLESS NOTED OTHERWISE.
2. ALL MEASUREMENTS ARE PER SITE CONDITION

SHOP DRAWING APPROVAL STATUS

A APPROVED B APPROVED AS NOTED
C REVISE AND RESUBMIT D NOT APPROVED

DISCIPLINE	ARCHITECT	CIVIL STRUCTURAL ENGINEER	MECHANICAL PLUMBING ENGINEER	ELECTRICAL ENGINEER	MEDICAL EQUIPMENT ENGINEER	OTHERS
NAME INITIALS						
SIGNATURE						
DATE						

54mm Fire Door FD60 Single Acting Single Door

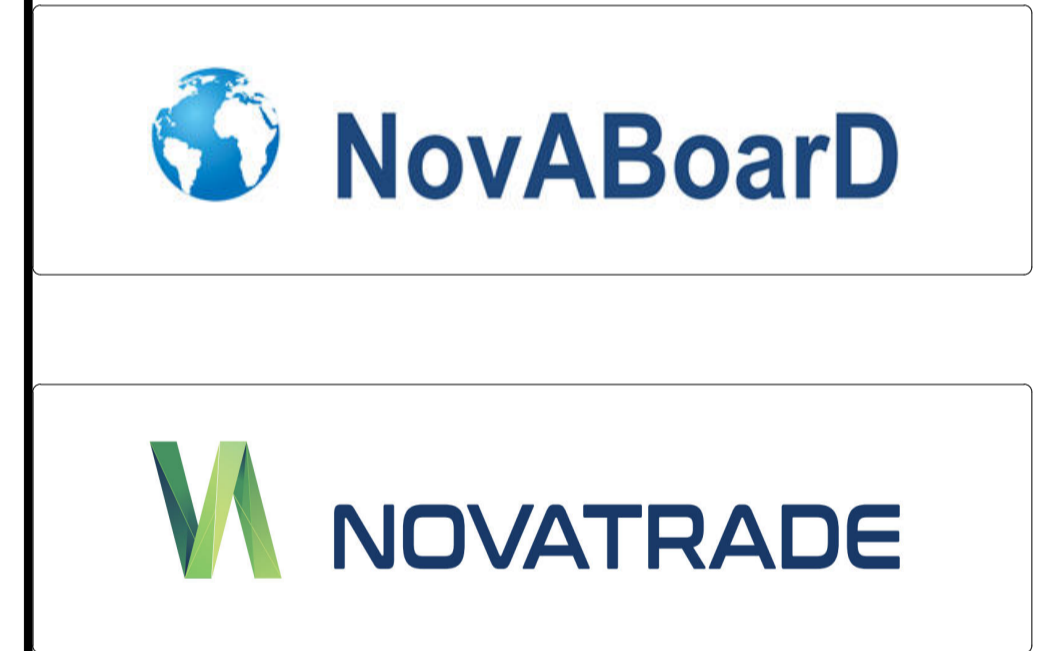

REV	DATE	DESCRIPTION	DRAWN	CHKD
REVISIONS				

- GENERAL NOTES**
- Note 1 : Frame material - Hardwood ≥ 650 kg/m³ Density @ 10% m/c ± 2%
 - Note 2 : Lipping material - Hard wood ≥ 650 kg/m³ Density @ 10% M/C ± 2%
 - Note 3 : Under cut of door standardized for 6mm.
 - Note 4 : Intumescent seal can be fitted on the frame 3 sides for fire rated doors. 2 nos 15x4mm. Approved Intumescent PVC pyroplex Brand
 - Note 5 : Finish can be Paint, Veneers & PVC, Plastic -Laminates, Decorative Paper (non metallic foil)
 - Note 6 : Fixing method for door leaf and frame using PU glue
 - Note 7 : Glue : material: polyurethane adhesive /brand name fevicol 1K, PUR adhesive
 - Note 8 : The intumescent protection sheet for hinges should be Mono ammonium phosphate dimension 30 X 101X 2 mm

DRAWN BY: LD	JOB No.:	DATE: 02/02/2016
CHECKED BY:	SCALE:	SHEET SIZE: A1
SHOP DRG. No.:	REVISION No.:	